




REAR ELEVATION

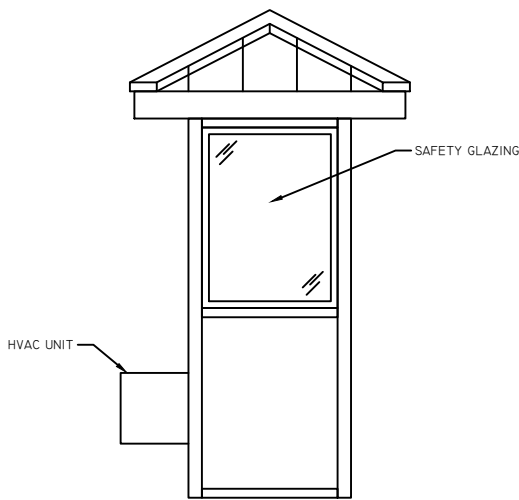


SIDE ELEVATION

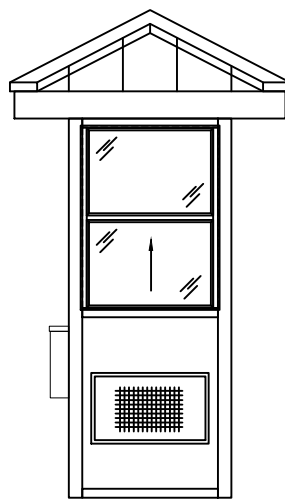


FRONT ELEVATION

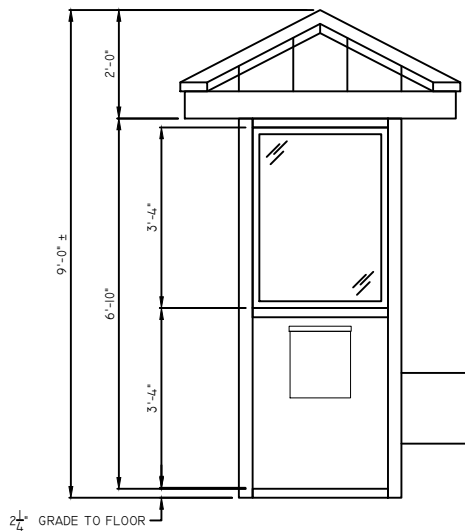


SIDE ELEVATION

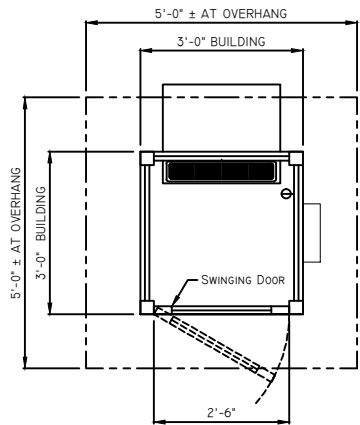

PLAN VIEW

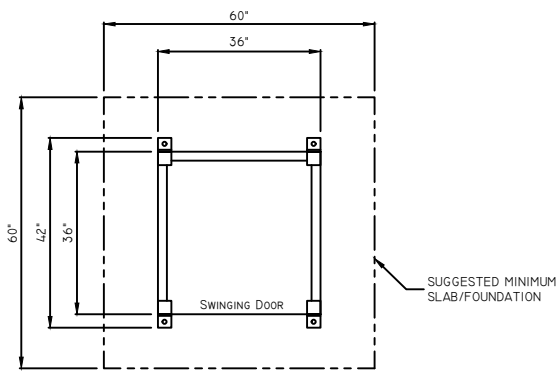

FOOT PRINT

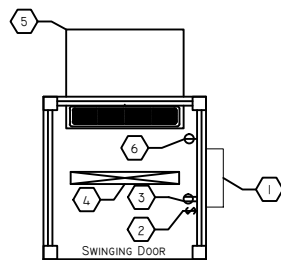

ELEC. PLAN

DESIGN NOTES

SWING ENTRY DOOR INCLUDES:
LOCKSET, HYDRAULIC CLOSER, FIX GLASS
IN UPPER PORTION OF DOOR AND
WEATHER STRIPPING.

GENERAL SITE INSTALLED ITEMS
PROVIDED BY OTHERS

- PROVIDE 120V/240V, SINGLE PHASE, 3-WIRE
SERVICE WITH GROUND.
- CONCRETE FOUNDATION/SLAB MINIMUM 6" DEEP,
3,000 PSI MINIMUM (28 DAY ACI 318). THE MINIMUM
FOUNDATION/SLAB SHOULD BE AS DIMENSIONED
ABOVE. THIS IS TO PROVIDE AN AMPLE CONCRETE
BORDER ON EACH SIDE OF THE BUILDING AND TO
PREVENT FRACTURING OF CONCRETE WHEN
ANCHORING.
- ADEQUATE SIZE DRILLED ANCHOR BOLTS.
SUGGESTED SIZE: 1/2" WEDGE ANCHOR (3-1/2"
MINIMUM EMBEDMENT INTO CONCRETE
SLAB/FOUNDATION.

ELECTRICAL NOTES

1. 120/240 VOLT, SINGLE PHASE, 125 AMP
RATED, 8-CIRCUIT LOAD CENTER.
2. LIGHT SWITCH FOR INTERIOR LIGHTS.
3. 120 VOLT, 20 AMP DUPLEX RECEPTACLE.
4. CEILING SURFACE MOUNTED,
FLUORESCENT LIGHT FIXTURE.
5. WALL MOUNTED HVAC UNIT.
6. 120 VOLT, 20 AMP SINGLE RECEPTACLE
FOR HVAC UNIT.

FINISH SCHEDULE

ITEM	DESCRIPTION
FLOOR	ALUMINUM TREADPLATE
STANDING SEAM METAL ROOF	MANSARD BROWN
INTERIOR WALLS	WHITE
EXTERIOR WALLS	SIERRA TAN
EXTERIOR WINDOW FRAMES	SIERRA TAN
CEILING	WHITE
SAFETY GLAZING	GRAY

MODEL NUMBER MFI-3030-SW	APPROVED BY:	
DATE: 6-6-2016	DRAWING NUMBER VI4-043	DRAWN BY: DNE
SCALE: NTS		REVISION: .
BEST DEAL BAY PLAZA BRONX, NY		
MARDAN FABRICATION, INC. WWW.MARDANFAB.COM 800-882-5820		DRAWING SHEET SD-I